

-

[illegible]
$$\int_{-1}^1 \frac{\sin s}{S(1-s^2)} ds$$

- b) Using Collocation method, find the solution of given governing equation

$$\frac{d^2\phi}{dx^2} + \phi + x = 0, 0 \leq x \leq 1 \text{ subject to the boundary conditions } \phi(0) = \phi(1) = 0.$$

Use $x = \frac{1}{4}$ and $\frac{1}{2}$ as the collocation points.

(16)

12. a) Determine the maximum deflection for the beam loaded as shown in Fig. 12(a), Youngs modulus 200 GPa and density $0.78 \times 10^6 \text{ kg/m}^3$. The beam is of 'T' cross section shown in Fig. 12(b). (16)

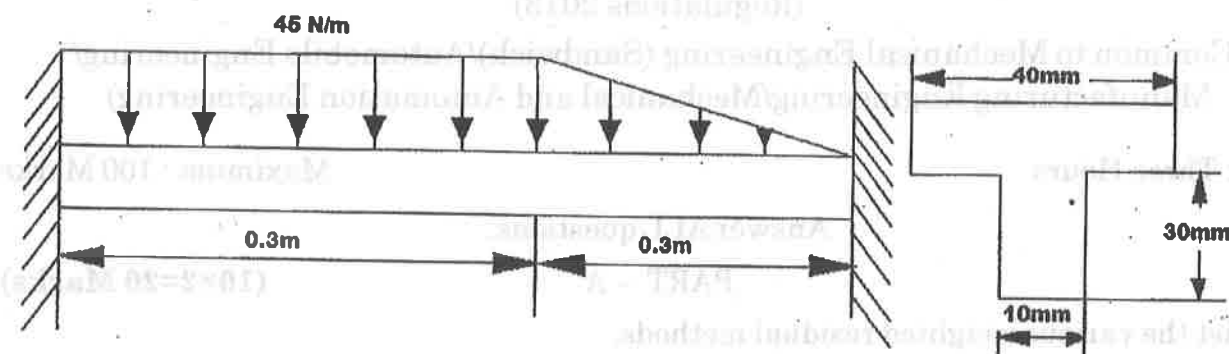


Fig. 12(a)

Fig. 12(b)

(OR)

- b) A metallic fin 20 mm wide and 4 mm thick is attached to a furnace whose wall temperature is 180°C . The length of the fin is 120 mm. If the thermal conductivity of the material of the fin is $350 \text{ W/m}^\circ\text{C}$ and convection coefficient is $9 \text{ W/m}^2^\circ\text{C}$, determine the temperature distribution assuming that the tip of the fin is open to the atmosphere and that the ambient temperature is 25°C . (16)
13. a) For the square shaft of cross section $1 \text{ cm} \times 1 \text{ cm}$ as shown in Fig. 13(a). It was decided to determine the stress distribution using FEM by solving for the stress function values. Considering geometric and boundary condition symmetry $1/8^{\text{th}}$ of the cross section was modeled using two triangular elements and one bilinear rectangular element as shown. The element matrices are given below. Carry out the assembly and solve for the unknown stress function values. (16)

$$\text{for triangle } K = \frac{1}{2} \begin{bmatrix} 1 & -1 & 0 \\ -1 & 2 & -1 \\ 0 & -1 & 1 \end{bmatrix} \quad \mathbf{r} = \begin{bmatrix} 29.1 \\ 29.1 \\ 29.1 \end{bmatrix}$$

$$\text{for rectangle } K = \frac{1}{6} \begin{bmatrix} 4 & -1 & -2 & -1 \\ -1 & 4 & -1 & -2 \\ -2 & -1 & 4 & -1 \\ -1 & -2 & -1 & 4 \end{bmatrix} \quad \mathbf{r} = \begin{bmatrix} 43.6 \\ 43.6 \\ 43.6 \\ 43.6 \end{bmatrix}$$

(OR)

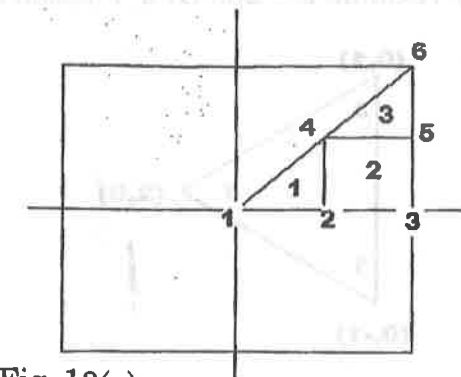


Fig. 13(a)

(OR)

- b) Determine the temperature distribution in the rectangular fin shown in Fig. 13(b). The upper half can be meshed taking into account symmetry using triangular elements. (16)

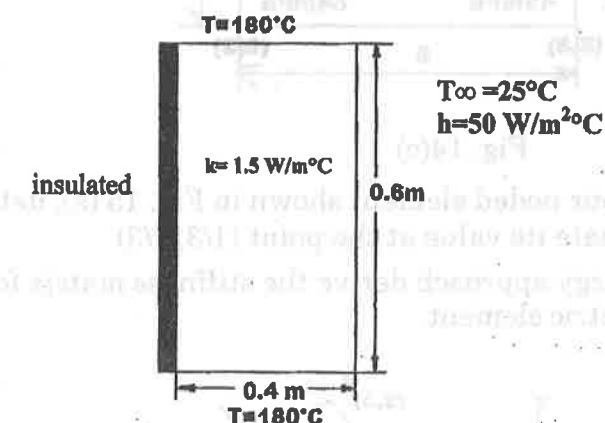


Fig. 13 (b)

14. a) i) The nodal co-ordinates for an axi-symmetric triangular element are given below. $r_1 = 10 \text{ mm}$, $r_2 = 40 \text{ mm}$, $r_3 = 40 \text{ mm}$, $z_1 = 10 \text{ mm}$, $z_2 = 10 \text{ mm}$, $z_3 = 50 \text{ mm}$. Evaluate strain displacement matrix. (10)
- ii) Nodal values of the triangular element is shown in Fig. 14 (a). Evaluate element shape functions and calculate the value of temperature at a point whose coordinates are given (5,7). (6)




Fig. 14(a)

(OR)